Peugeot 308 radio and touchscreen removal instructions

Release the centre console panel from around the gear stick. This is held in place with clips, use a panel tool to release and lift up.



With the centre console lifted up, the two screws at the bottom of the radio are accessible. Remove these two screws.




The top of the radio unit is held in by clips. There are two small slits at either end of the radio unit, use a radio removal key to push through the slit and release the clips. Note: the right hand side by the steering wheel is tricky to access, bend a stereo release key to a 90° angle to release this clip.



With the radio unit removed the air vents now need to be removed.

To remove the right air vent reach through the space where the radio was removed, at the bottom of the air vent you will be able to feel a spring clip, note the location of clip from the image. Push the clip in and push the back of the air vent to remove it.

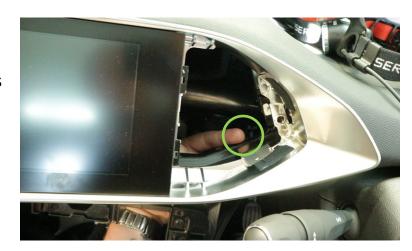


To the left air vent is harder to access, prise up the bottom of the air vent and shine a torch in and look for a felt strip.

Line up a thin trim tool to the right of the felt strip, this will guide the trim tool to release the clip holding the air vent in.

Tip, using another trim tool, reach up through the radio hole to the back of the air vent, there is a 4-5mm gap at the back of the air vent, insert a trim tool to give leverage to push out the air vent.

Two screws at either end of the silver trim now need to be removed.

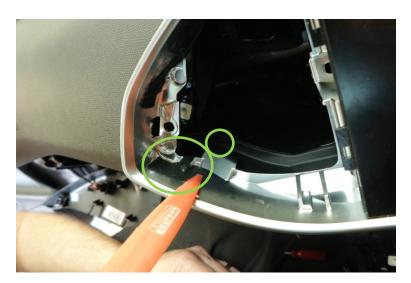





Finally, release the screen and silver trim that is held in by 4 spring clips, two at either end of the touch screen.



These instructions are intended as a guide. The car featured is a UK right hand drive model, other models may be different.

Care must be taken during all stages of the radio and touchscreen removal to avoid damaging the car and equipment.